

Product data sheet

Automation technology - Voltage and Power Supply



Product description **M12 Female panel mount connector, Contacts: 5, unshielded, single wires, IP68, UL, M16x1.5**

Area **series 823**

Part no. **76 0244 0015 00845-0200**

Overvoltage category **III**

Insulating material group **I**

EMC compliance **unshielded**

Material

Housing material **Zinc die-cast nickel-plated**

Contact body material **PA**

Contact material **CuSn (bronze)**

Contact plating **Au (gold)**

REACH SVHC **CAS 7439-92-1 (Lead)**

SCIP number **b5dd3761-4677-4564-89e8-4e1cbffc4698**

PFAS present **yes**

Authorization/approvals


Approvals **UL**

Classifications

eCl@ss 11.1 **27-44-01-09**

ETIM 9.0 **EC003569**

Assembly instructions / Panel cut-out

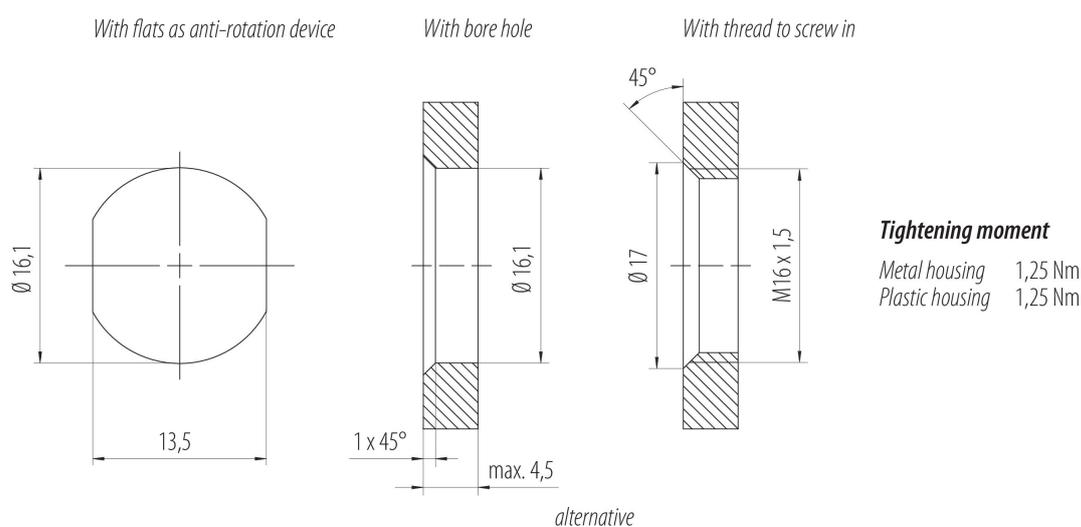


Product data sheet

Automation technology - Voltage and Power Supply



Product description **M12 Female panel mount connector, Contacts: 5, unshielded, single wires, IP68, UL, M16x1.5**
Area **series 823**
Part no. **76 0244 0015 00845-0200**

Derating curve

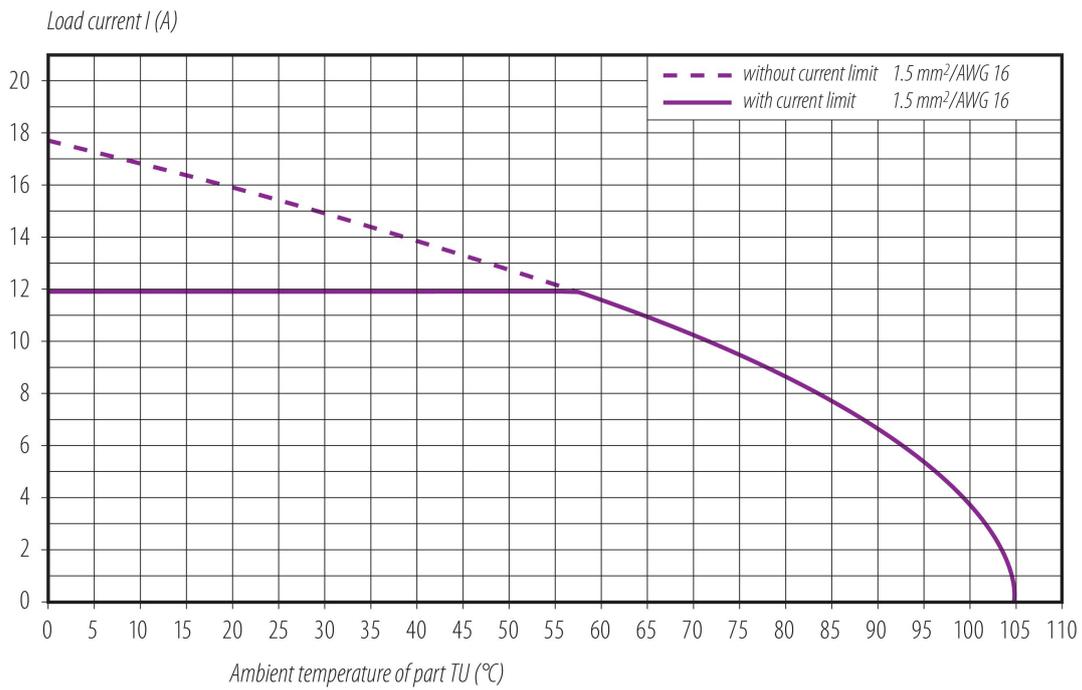

Product description	M12 Female panel mount connector, Contacts: 5, unshielded, single wires, IP68, UL, M16x1.5
Area	series 823
Part no.	76 0244 0015 00845-0200

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).