

Product data sheet

Automation technology - Voltage and Power Supply



Product description	M12 Female panel mount connector, Contacts: 5, unshielded, single wires, IP68, UL, M16x1.5
Area	series 824
Part no.	76 0246 0136 00035-0200

Pollution degree	3
Overvoltage category	III
Insulating material group	II
EMC compliance	unshielded

Material

Housing material	CuZn (Brass nickel plated)
Contact body material	PA
Contact material	CuSn (bronze)
Contact plating	Au (gold)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	ac2337f5-1f2d-4dea-8fad-04c75c573309
PFAS present	yes

Authorization/approvals

Approvals	UL
-----------	----

Classifications

eCl@ss 11.1	27-44-01-09
ETIM 9.0	EC003569

Product data sheet


Automation technology - Voltage and Power Supply




Product description **M12 Female panel mount connector, Contacts: 5, unshielded, single wires, IP68, UL, M16x1.5**
 Area **series 824**
 Part no. **76 0246 0136 00035-0200**

Assembly instructions / Panel cut-out

With flats as anti-rotation device

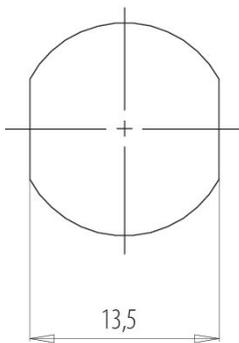

With bore hole

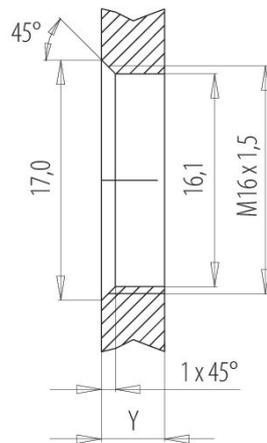

Installation direction:
o-ring sits on chamfer.

Tightening moment

Metall housing/Plastic housing 1,25 Nm


Thickness of wall Y (mm)		
Version	min (mm)	max (mm)
Fastened from rear	2	3,5
Front fastened	2	4,5
positioning possible ¹⁾	2	3,5
Screw clamp	2	3,5
Thread M12 x 1	2	3,0
Thread M14 x 1 ²⁾	³⁾ 1,5/ ⁴⁾ 2	6,5

Notes

- ¹⁾ Do not attach a chamfer
- ²⁾ Wall thickness:
use nut 38 5385 100 001 up to 1,5 mm,
>1,5 mm cut thread
- ³⁾ Nut
- ⁴⁾ Thread in wall of housing

Product description **M12 Female panel mount connector, Contacts: 5, unshielded, single wires, IP68, UL, M16x1.5**
Area **series 824**
Part no. **76 0246 0136 00035-0200**

Derating curve

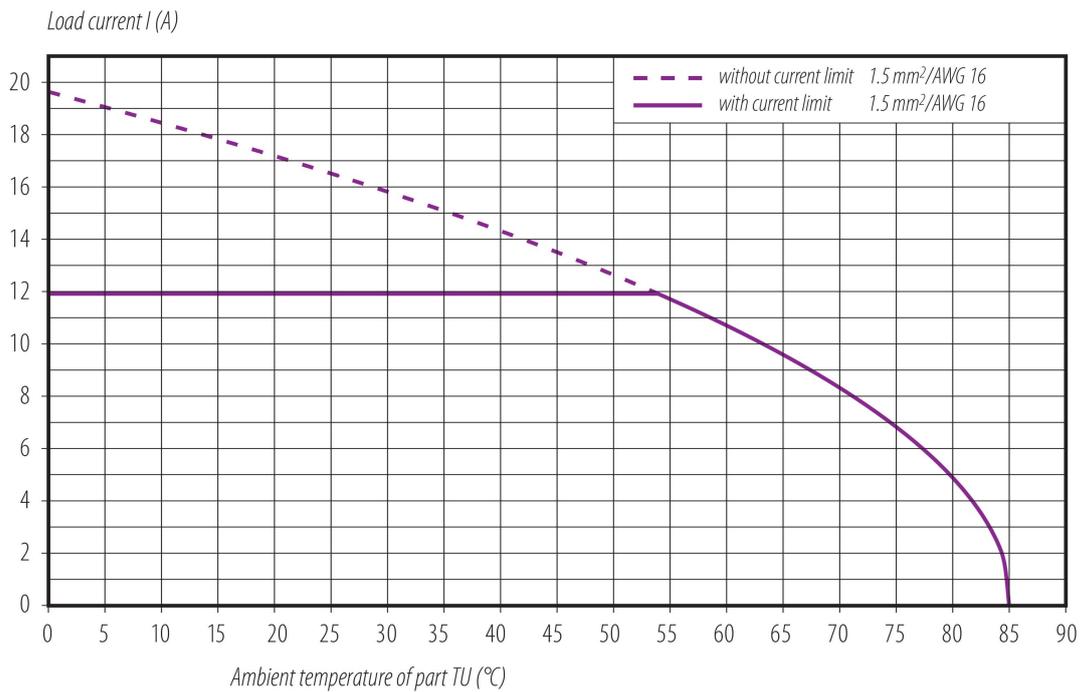

Product description	M12 Female panel mount connector, Contacts: 5, unshielded, single wires, IP68, UL, M16x1.5
Area	series 824
Part no.	76 0246 0136 00035-0200

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).

In the case of cable connectors with a metal threaded ring, it is imperative to ensure a connection with the PE protective contact of the appliance connector. Connecting cables between appliance connectors that are not connected to the PE contact are not permitted. The user must ensure a continuous connection of the protective earth conductor.